


BOMBAY
TOOLS YOUR INDUSTRIAL PARTNER

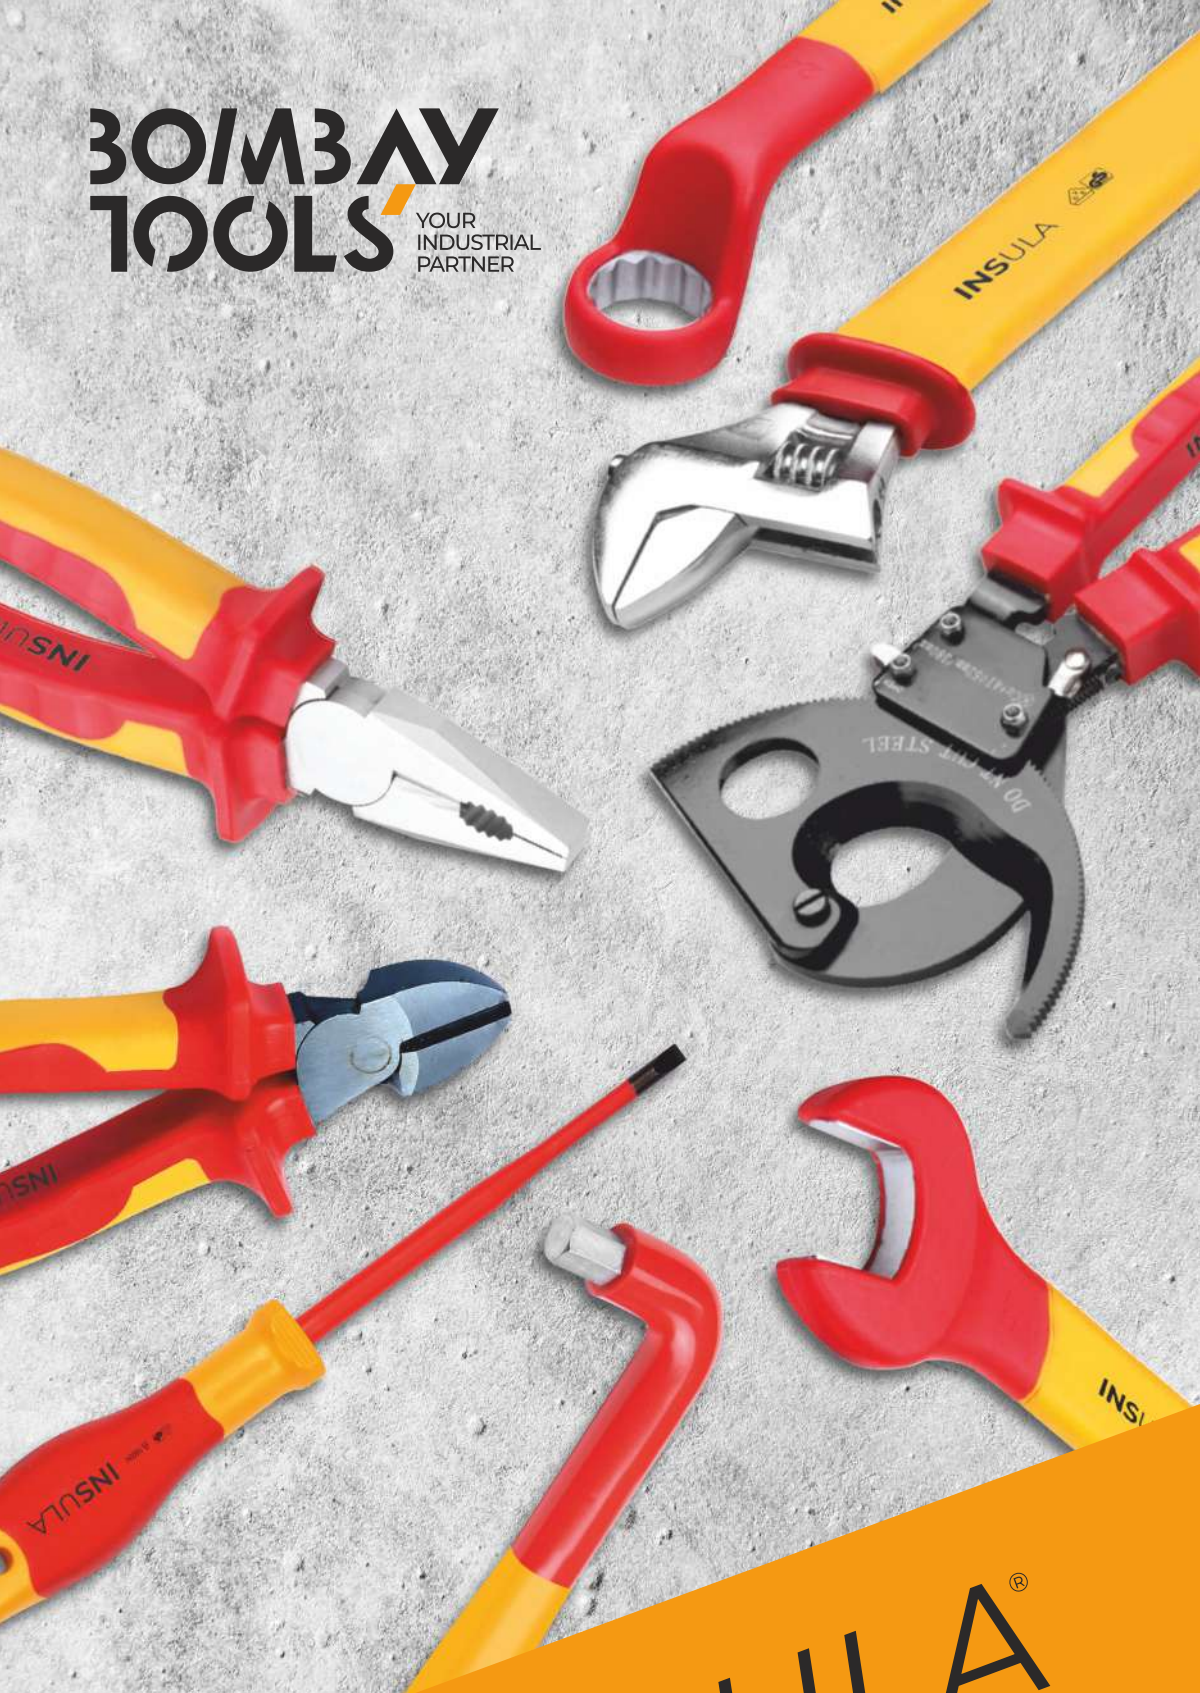

INSULA[®]

Insulated Tools for Electrical Safety
2025 Catalogue

GET SAFE

INDUSTRIAL SAFETY EQUIPMENT



INSULA

INSULATED HAND TOOLS FOR ELECTRICAL SAFETY

1000 Volts insulated tools

Electrical Cars, Automation, IoT, & AI in the Industrial space are already here. To support new as well as existing technologies requires the industry to maintain labyrinth network of electrical cables, circuitries & panels. In our quest to be more intelligent 'safety' cannot be neglected at any point. For regular operations & maintenance of electrical equipment & circuitry requires the correct set of tools. Our full range of Insulated Hand Tools have been providing to the industry the tools needed for the above.

Why 1000 Volts insulated tools?

The working end (business end) of hand tools are made from regular steel or chrome vanadium. This poses a major risk of shock for operators performing electrical operation or maintenance. Insulated tools are basically made from regular steel alloy with a PVC insulation that is applied using either of the 2 processes – dipping or injection moulding. Both these processes are carefully applied to each tool to ensure correct amount of insulation.

WHY CHOOSE INSULA



When working in live wires/ systems these tools provide insulation from electric shock



During electrical ops & maint systems remain energized even after shutdown. These tools provide safety to operator from fatal shock

CERTIFICATIONS



VDE

The VDE Testing and Certification Institute is a nationally and internationally accredited institution in the field of testing and certification of electrical engineering devices, components and systems. These electrical products are tested for safety, electromagnetic compatibility and other product properties.



VDE - GS MARK

Technical working equipment and consumable materials subject to the applicable device and product safety laws bear the VDE-GS mark, which stands for the safety of the product with regard to electrical, mechanical, thermal, toxicological, radiological and other dangers. In addition, tools with the VDE-GS mark conform to the VDE regulations or European or internationally harmonised standards, i.e. they confirm the compliance with the safety requirements of the respective guidelines.



DOUBLE TRIANGLE AND VOLTAGE RANGE

If insulated tools or aids are marked with the symbol of the double triangle and the assigned voltage or voltage range specification or the class, they are suitable for working on energised parts at the stated voltage.



IEC 60900

An international standard which, among other things, describes the design of insulated tools in detail. For example, the thickness of the protective insulation is specified. In addition, the standard defines individual tests (piece tests) as well as series and random sample tests for checking the electrical safety of the protective insulation.

OUR TOOLS ARE TESTED UNDER



IMPACT TEST

There are two tests carried out: The first test is performed at an ambient of $-25 \pm 3^{\circ}\text{C}$ (the tools lay in a cold chamber for 2 hours), if with C marked test need to be done by $-40 \pm 3^{\circ}\text{C}$ and is carried out 120 seconds after the tools have been removed from the chamber. The second test is carried out at ambient temperature of $23 \pm 5^{\circ}\text{C}$. The hammer is allowed to fall freely on three different places of the insulated material. The test piece is acceptable if the handle is not cracked, broken or does not show signs of faking. This test can be compared to a fall of the tool from a height of 0.6m at a temperature of -25°C and a fall from a height of 2m at room temperature.



ELECTRICAL TEST

Before testing, the tools are immersed in a bath of water at room temperature of 24 hours (± 0.5 hours). The test pieces are acceptable if there is no electrical discharge, spark over or flashover, during the 3 minutes of testing at a voltage of 10 KV.



STAMP TEST

The indenter, loaded with a weight of 20N and a voltage of 5 KV, is applied to the centre of the handle. The test is successful if the test piece subsequently passes the electrical test.

INSULATION TEST

Before testing the test piece is heated to $70^{\circ}\text{C} \pm 3^{\circ}\text{C}$ for 168 hours. The hanger is loaded with weights (500N), wrenches and sockets sets with weights (100N).

The duration of test is 3 minutes after the test piece has been removed from heat. The test piece is acceptable if the handle remains firmly attached to the conducting part after 3 minutes of testing.



FLAME RETARDANCY TEST

The flame is applied to the test piece for 10 seconds. The test piece is acceptable if the height of the flame on the burning handle does not exceed 120mm in an observation period of 20 seconds after the burner has been removed.

OUR CUSTOMERS

OIL & GAS

- Hindustan Petroleum Corp Ltd.(HPCL)
- Bharat Petroleum Corp Ltd.(BPCL)
- Indian Oil Corporation Ltd.(IOCL)
- Oil and Natural Gas Corp (ONGC)
- GAIL (India) Ltd.
- Mangalore Refinery & Petrochem Ltd.(MRPL)
- Reliance Industries Ltd.
- Nayara Energy Ltd.
- Sterling and Wilson Renewable Energy Ltd.
- TotalEnergies

AUTOMOBILE

- Mahindra & Mahindra
- Maruti Suzuki India Ltd.
- Honda Motorcycle & Scooter India Pvt. Ltd
- Tata Motors Ltd.
- Hero MotoCorp Ltd.
- MG Motor India Private Ltd.

STEEL MINING

- JSW Group
- Tata Steel Ltd
- ArcelorMittal and Nippon Steel India
- Hindalco Industries Ltd

DATA CENTERS

- Reliance Jio Infocomm Ltd.
- Vodafone Idea Ltd.
- Delta Electronics, Inc
- STT Global Data Centres India Pvt. Ltd

CEMENT

- UltraTech Cement Ltd
- Ambuja Cements Ltd. & ACC Ltd.
- Dalmia Bharat Group
- HeidelbergCement

PHARMA COMPANIES

- Sun Pharmaceutical Industries Ltd
- Lupin Ltd.
- Zydus Lifesciences Ltd.
- Mylan Pharmaceuticals Pvt Ltd

POWER

- Torrent Power Ltd.
- Adani Electricity Mumbai Ltd. (AEML)
- NTPC Ltd.
- Nuclear Power Corporation of India Ltd.
- Power Grid Corporation of India Ltd.

OTHERS

- Grasim Industries Ltd.
- United Breweries Ltd.
- Mondelez International, Inc
- Asian Paints Ltd.
- AkzoNobel India Ltd.



Trusted | Reliable | Effective
Your Partner in Safety & Success

SCREWDRIVERS

INSULATED SLOTTED SCREWDRIVER (-)



					PN
0.4	2.5	75	95x25	170	IC0204
0.5	3.0	100	95x25	195	IC0205
0.6	3.5	100	95x25	195	IC0206
0.8	4.0	100	105x30	205	IC0208
1.0	5.5	125	115x35	240	IC0210
1.2	6.5	150	115x35	265	IC0212



INSULATED SLIM TYPE SLOTTED SCREWDRIVER (-)



					PN
0.5	3.0	100	95x25	195	IC0305
0.6	3.5	100	95x25	195	IC0306
0.8	4.0	100	105x30	205	IC0308
1.0	5.5	125	115x35	240	IC0310
1.2	6.5	150	115x35	265	IC0312



INSULATED PHILLIPS SCREWDRIVER



	Ø mm				PN
PH0	3.0	60	95x25	155	IC0400
PH1	5.0	80	105x30	185	IC0401
PH2	6.0	100	115x35	215	IC0402
PH3	8.0	150	118x41	268	IC0403



INSULATED SLIM TYPE PHILLIPS SCREWDRIVER



	Ø mm				PN
PH1	5.0	80	105x30	185	IC0501
PH2	6.0	100	115x35	215	IC0502
PH3	8.0	150	118x41	268	IC0503



INSULATED POZI SCREWDRIVER



	Ø mm				PN
PZ0	3.0	60	95x25	155	IC0600
PZ1	5.0	80	105x30	185	IC0601
PZ2	6.0	100	115x35	215	IC0602
PZ3	8.0	150	118x41	268	IC0603

 1000V

INSULATED TX SCREWDRIVER



	Ø mm				PN
T10	3.0	70	95x25	165	IC0810
T15	4.0	80	105x30	185	IC0815
T20	4.0	100	105x30	205	IC0820
T25	5.0	125	115x35	240	IC0825
T30	6.0	130	115x35	245	IC0830

 1000V

INSULATED NUT SCREWDRIVER



	Ø mm					PN
4.0	7.2	125	25	105x30	230	IC1204
5.0	7.2	125	25	105x30	230	IC1205
5.5	7.2	125	25	105x30	230	IC1255
6.0	7.2	125	25	105x30	230	IC1206
7.0	7.2	125	25	105x30	230	IC1207
8.0	7.2	125	25	105x30	230	IC1208
9.0	7.2	125	25	105x30	230	IC1209
10.0	7.2	125	25	105x30	230	IC1210
11.0	8.1	125	25	118x41	243	IC1211
12.0	8.1	125	25	118x41	243	IC1212
13.0	8.1	125	25	118x41	243	IC1213
14.0	8.1	125	25	118x41	243	IC1214

 1000V

INSULATED HEX SCREWDRIVER



		Ø mm			PN
H2.5	75	S2.5	95x25	170	IC1025
H3	75	S3.0	95x25	170	IC1003
H4	75	S4.0	105x30	180	IC1004
H5	75	S5.0	105x30	180	IC1005
H6	100	S6.0	115x35	215	IC1006
H8	100	S8.0	118x41	218	IC1008

 1000V

7PC INSULATED SCREWDRIVER SET

PN : IC2408



Content			
	0.4*2.5*7.5	0.8*4.0*100	1.0*5.5*125
	PH0x100	PH1x100	PH2x100
Line Tester 1 Pc			
Handle: 31*118			



12PC INSULATED CHANGEABLE SCREWDRIVER SET

PN : IC3212




Content			
	0.4x2.0x100	0.4x2.5x100	0.8x4.0x100
	0.5x3.0x100	0.6x3.5x100	
	1.0x5.5x100	1.2x6.5x100	
	PH0x100	PH1x100	PH2x100
Voltage Tester: 3.0x70			
Handle: 31*118			



INSULATED PRECISION SCREWDRIVER SET

PN : IC2207

Size	PN
1.5x0.23x50	IC1415
1.8x0.3x50	IC1418
2.0x0.4x50	IC1420
2.5x0.4x50	IC1425
3.0x0.5x50	IC1430
PH00x50	IC1600
PH0x50	IC1601



50PC INSULATED CHANGEABLE SCREWDRIVER SET

PN : IC3450



Content						
	0.4x2.0x100 0.6x3.5x100	0.4x2.5x100 0.8x4.0x100	0.5x3.0x100 1.0x5.5x100	1.2x6.5x100		
	PH0x100	PH1x100	PH2x100			
	PZ0x100	PZ1x100	PZ2x100			
	T6x100 T25x100	T8x100 T27x100	T9x100 T30x100	T10x100	T15x100	T20x100
	H2.5x100	H3.0x100	H4.0x100	H5.0x100	H6.0x100	
	R1x100	R2x100				
	TR 1x100	TR 2x100	TR 3x100	TR 4x100		
	TORO 4x100	TORO 6x100	TORO 8x100	TORO 10x100		
	M4x4.0x100	M5x5.0x100	M6x5.0x100			
	4x100	6x100	8x100	10x100		
	6.3x89	8.1x89				
	14*89					
	9*89					
Voltage Tester: 3.0x70						
Handle: 31*118						

PLIERS

INSULATED COMBINATION PLIER



L (mm)	PN
160	DA0116
200	DA0120

   1000V

INSULATED SNIPE NOSE SIDE CUTTING PLIER



L (mm)	PN
160	DA0316
200	DA0320

   1000V

INSULATED CURVED NOSE CUTTING PLIER



L (mm)	PN
160	DA0516
200	DA0520

   1000V

INSULATED HEAVY DUTY DIAGONAL CUTTING PLIER



L (mm)	PN
180	DA0718

   1000V

INSULATED WIRE STRIPPER



L (mm)	Ø mm	 mm ²	PN
160	5.0	10.0	DA1316

   1000V

INSULATED CABLE SHEAR



L (mm)	 mm	Ø mm ²	PN
250	250	80	DA1725

   1000V

INSULATED PLASTIC PLIER




L (mm)	PN
200	IF1020



1000V

INSULATED ROUND NOSE PLIER

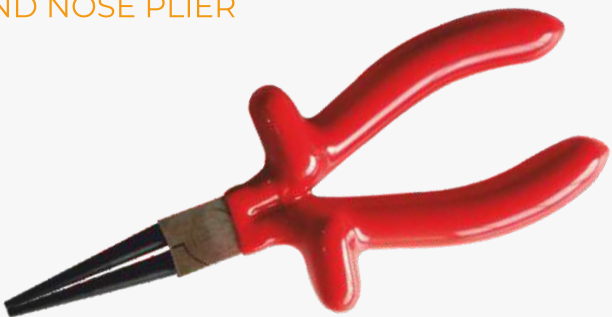

L (mm)	PN
160mm	DA1116



1000V

INSULATED FLAT NOSE PLIER



L (mm)	PN
160mm	DA0920



1000V

INSULATED DIAGONAL CUTTING PLIER



L (mm)	PN
160	DA0716

   1000V

INSULATED RATCHETING CABLE CUTTER



L (mm)	 mm ²	Ø mm
245	240	32
325	380	52

   1000V

INSULATED WATER PUMP PLIER



L (mm)	max	PN
250	28	DA1525
300	30	DA1530


   1000V

WRENCHS

INSULATED OPEN WRENCH



S (mm)	A	B	L	PN
6	7	21.8	89.5	DD0106
7	7	24	89.9	DD0107
8	7.5	25.3	99.5	DD0108
9	7.5	27.4	99.2	DD0109
10	8	31	110	DD0110
11	8.5	34	120	DD0111
12	8.5	36	130	DD0112
13	10.5	39	140	DD0113
14	10.5	40	150	DD0114
15	11.5	42	160	DD0115
16	11.5	43	165	DD0116
17	12.5	47	165	DD0117
18	13	50	175	DD0118
19	14	53	180	DD0119
21	14	55	195	DD0121
22	14	58	205	DD0122
24	14	62	230	DD0124
27	13.8	60	249	DD0127
30	14.6	64	284	DD0130
32	15.7	68	308	DD0132



INSULATED RING WRENCH




S (mm)	A	B	L	H	PN
6	7	13	130	17	DD0306
7	7.5	15	140	18	DD0307
8	8.5	16.5	150	19	DD0308
9	9	18	160	19	DD0309
10	9	21	170	20	DD0310
11	10	22.5	180	21	DD0311
12	10	22.5	190	21	DD0312
13	11	26.5	200	23	DD0313
14	12	28	210	23	DD0314
15	12	29	215	24	DD0315
16	12	31	215	26	DD0316
17	13	32	220	26	DD0317
18	13	35	230	28	DD0318
19	14	36	240	28	DD0319
21	14	39	250	30	DD0321
22	15	41	260	30	DD0322
24	16	44	280	32	DD0324
27	18	48	290	32	DD0327
30	19	53	310	33	DD0330
32	20	56	320	33	DD0332



INSULATED RING GEAR WRENCH



S (mm)	L	A	PN
7	120	22	DD2707
8	120	22	DD2708
9	125	24	DD2709
10	135	26	DD2710
11	140	28	DD2711
12	145	29	DD2712
13	150	31	DD2713
14	160	33	DD2714
15	165	34	DD2715
16	170	36	DD2716
17	180	38	DD2717
18	190	39	DD2718
19	200	40	DD2719
22	230	47	DD2722
24	260	52.5	DD2724



INSULATED ADJUSTABLE WRENCH

L (mm)	S(Max)mm	PN
200	24	DD0520
250	28	DD0525
300	32	DD0530



 1000V

INSULATED ALLEN KEY


L (mm)	□I (mm)	PN
130	3	DD2503
140	4	DD2504
160	5	DD2505
180	6	DD2506
200	8	DD2508
235	10	DD2510
260	12	DD2512



 1000V

INSULATED HEX KEY T-TYPE WITH BALL END

	Ø mm			PN
2.5	5.0	150	80x26	ID0702
3.0	5.5	150	80x26	ID0703
4.0	7.0	150	80x26	ID0704
5.0	8.0	150	100x34	ID0705
6.0	9.0	150	100x34	ID0706
8.0	11.0	150	115x40	ID0708

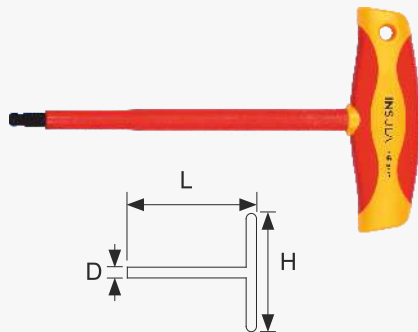

 1000V

INSULATED RATCHET WRENCH




☐	L (mm)	PN
1/4"	145	DD2114
3/8"	200	DD2138
1/2"	250	DD2112

 ⚡ 1000V

INSULATED SOCKET WRENCH



	D	L	H	PN
8	15.0	200	155	DD0908
10	19.5	300	155	DD0920
12	22.0	300	155	DD0922
13	23.5	300	155	DD0923
14	24.5	300	155	DD0924
16	27.0	300	155	DD0926
17	28.5	300	155	DD0927
18	29.5	300	155	DD0928
19	31.0	300	155	DD0929

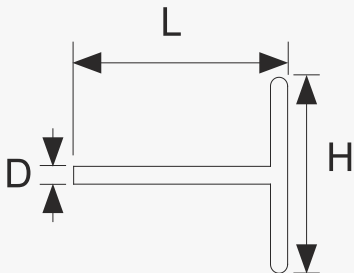

 ⚡ 1000V

INSULATED TORQUE WRENCH

☐	N.m	PN
1/4"	1-5	ID1000
1/4"	2-10	ID1001
1/4"	5-25	ID1002
3/8"	1-5	ID2004
3/8"	2-10	ID2006
3/8"	5-25	ID2008
3/8"	10-50	ID2012
1/2"	10-50	ID3012
3/8"	20-100	ID2016
1/2"	20-100	ID3016
1/2"	40-200	ID3020



 ⚡ 1000V

SOCKETS & ACCESSORIES

INSULATED ADAPTER

	H	PN
1/2" (Female) to 3/8" (Male)	77	DD1238
3/8" (Female) to 1/2" (Male)	72	DD3812

  ⚡ 1000V



INSULATED Z TYPE ADAPTER 3/8"

PN : DD4038

	
3/8"	10


  ⚡ 1000V



INSULATED ALLEN SOCKET


	L (mm)	D	PN
1/4"	66	3	IS0802
	66	4	IS0803
	66	5	IS0804
	66	6	IS0805
	66	8	IS0806
3/8"	75	4	DD1904
	75	5	DD1905
	75	6	DD1906
	75	8	DD1908
1/2"	120	4	DD1704
	120	5	DD1705
	120	6	DD1706
	120	8	DD1708
	120	10	DD1710

  ⚡ 1000V



INSULATED SOCKET

	Size (mm)	D	PN
3/8"	6	14.5	DD1506
	7	16	DD1507
	8	17	DD1508
	9	18	DD1509
	10	20	DD1510
	11	21	DD1511
	12	23	DD1512
	13	23.5	DD1513
	14	25	DD1515
	15	26	DD1514
	16	27	DD1516
	17	28.5	DD1517
	18	30	DD1518
	19	31	DD1519
1/2"	20	33	DD1520
	21	33	DD1521
	22	35	DD1522
	10	21	DD1310
	11	22	DD1311
	12	23	DD1312
	13	24	DD1313
	14	26	DD1314
	16	27	DD1316
	17	29	DD1317
	18	30.5	DD1318
	19	31	DD1319
	21	33	DD1321
	22	35	DD1322
	24	37	DD1324
	27	41	DD1327
	30	45	DD1330
	32	47	DD1332



⚡ 1000V

INSULATED TORX SOCKET

Sq Dr	Size (mm)	L (mm)	PN
1/4"	T10	66	IST2010
	T15	66	IST1015
	T20	66	IST1020
	T25	66	IST1025
	T27	66	IST1027
	T30	66	IST1030
	T40	66	IST1040
3/8"	T10	75	TS3810
	T15	75	TS3815
	T20	75	TS3820
	T25	75	TS3825
	T27	75	TS3827
	T30	75	TS3830
	T40	75	TS3840
	T45	75	TS3845
	T50	75	TS3850
	T55	75	TS3855



⚡ 1000V

INSULATED L- HANDLE

☐	L (mm)	PN
1/2"	270	DD2812

  1000V



INSULATED T- HANDLE

☐	L (mm)	H	PN
3/8"	200	140	DD1138
1/2"	200	140	DD1112

  1000V



INSULATED DEEP SOCKET

☐	Size (mm)	D1 (mm)	D2 (mm)	L (mm)	PN
1/4"	4mm	12	18	67	ISDH0104
	5mm	13	18	67	ISDH0105
	6mm	14	18	67	ISDH0106
	7mm	16	18	67	ISDH0107
	8mm	18	18	67	ISDH0108
	9mm	18	18	67	ISDH0109
	10mm	19	18	67	ISDH0110
	11mm	21	18	67	ISDH0111
	12mm	22	18	67	ISDH0112
	13mm	23	18	67	ISDH0113



INSULATED BI-HEX DEEP SOCKET

☐	Size (mm)	D1 (mm)	D2 (mm)	L (mm)	PN
3/8"	8mm	17	23	80	DS3808
	10mm	20	23	80	DS3810
	12mm	22	23	80	DS3812
	14mm	25	23	80	DS3814
	15mm	26	23	80	DS3815
	17mm	28.5	23	80	DS3817
	19mm	31	23	80	DS3819
	22mm	35	23	80	DS3822

  1000V



INSULATED EXTENSION BAR

☐	L (mm)	PN
1/4"	75	DD2305
	150	DD2306
3/8"	75	DD2307
	125	DD2303
	250	DD2304
1/2"	125	DD2301
	250	DD2302

  1000V



KNIVES

INSULATED CABLE KNIFE (STRAIGHT)

L	D	PN
180	50	IE0418



1000V



INSULATED DISMANTLING KNIFE (SEMI-CIRCLE)

L	D	PN
170	28	IE0616



1000V



INSULATED DISMANTLING KNIFE (LONG HOOK)

L	D	PN
180	50	IE1018



1000V



INSULATED CABLE KNIFE (GUARD)

L	D	PN
180	50	IE1218



1000V




INSULATED DISMANTLING KNIFE

L	D	PN
185	38	IE1416



1000V




ACCESSORIES

INSULATED HACKSAW FRAME

D	L	PN
150	300	IE0230
300	483	IE0240



⚡ 1000V



INSULATED Mallet

L (mm)	Ø mm	PN
300	30	IG1030



⚡ 1000V



INSULATED TWEEZER

L (mm)	PN
135	IF0213



⚡ 1000V



INSULATED GLOVES

Classification	Max Working Voltage (AC)	Proof Test Voltage (AC)	Withstand Voltage (AC)	Max use Voltage (DC)
Class 00	500	2,500	5,000	750
Class 0	1,000	5,000	10,000	1500
Class 1	7,500	10,000	20,000	11250
Class 2	17,000	20,000	30,000	25500
Class 3	26,500	30,000	40,000	39750
Class 4	36,000	40,000	50,000	54000



⚡ 1000V



TOOL SETS

INSULATED BATTERY TOOLKIT

PN : IH0815

4 Screwdriver bits	PH2, PH1, F5, F4
2 in 1 Bits holder	(for the above bits)
Open Wrench	8mm, 10mm, 1300
T- Handle	3/8"
Ring Wrench	8mm, 10mm, 13mm
Sockets 3/8"	8mm, 10mm, 13mm



⚡ 1000V



25PC INSULATED TOOLKIT

PN : IH0825



Content	mm
Combination Plier	200
Diagonal Plier	160
6Pcs Screwdriver	PH: PH0x60, PH1x80, PH2x100 SL: 0.6X3.5X100, 0.8X4.0X100, 1.0X5.5X125
Cable Knife(Straight)	50x180
Cable Knife(Semicircle)	28x155
7Pcs 1/2" Sockets	10, 11, 12, 13, 14, 17, 19
7Pcs 1/2" Open End Wrench	10, 11, 12, 13, 14, 17, 19
T-Handle	1/2"



31PC INSULATED TOOLKIT

PN : IH0831



Content	mm
Combination Plier	200
Diagonal Plier	160
6Pcs Screwdriver	PH: PH0x60, PH1x80, PH2x100 SL: 0.6X3.5X100, 0.8X4.0X100, 1.0X5.5X125
Cable Knife(Straight)	50x180
Cable Knife(Semicircle)	28x155
7Pcs Sockets	10, 11, 12, 13, 14, 17, 19
7Pcs Open End Wrench	10, 11, 12, 13, 14, 17, 19
Insulated T-Handle	1/2"
Insulated Allen Key	3, 4 , 5, 6, 8, 10



20PC INSULATED RING WRENCH SET

PN : DD CS-06

6mm, 7mm, 8mm, 9mm, 10mm, 11mm, 12mm, 13mm, 14mm, 15mm, 16mm, 17mm, 18mm 19mm, 21mm, 24mm, 27mm, 30mm, 32mm



20PC INSULATED OPEN WRENCH SET

PN : DD CS-05

6mm, 7mm, 8mm, 9mm, 10mm, 11mm, 12mm, 13mm, 14mm, 15mm, 16mm, 17mm, 18mm 19mm, 21mm, 24mm, 27mm, 30mm, 32mm



52PC INSULATED TOOLKIT

PN IH1852

- Content
- A Tray
- B Tray
- C Tray
- D Tray

  ⚡ 1000V



INSULATED A TRAY

- Content
- 6 pcs Pliers
- 7" Combination Pliers
- 8" Long Nose Pliers
- 6" Diagonal Cutter
- 6" Stripping Pliers
- 10" Water Pump Pliers
- 6" Cable Cutter

  ⚡ 1000V



INSULATED B TRAY

- Content
- 11 pcs Screwdrivers, Knife & Tester
- PH0X60, PH1X80, PH2X100, PH3X150
- 2.5x75mm, 3x100mm, 4x100mm, 5.5x125mm, 6.5x150mm
- Straight Knife
- Voltage Tester

  ⚡ 1000V



INSULATED C TRAY

- Content
- 21 pcs 1/2" Sockets and Accessory
- Sockets Bits: 4, 5, 6, 8mm
- Sockets: 10/ 11/ 12/ 13/ 14/ 16/ 17/ 18/ 19/ 21/ 22/ 24/ 27
- Extension Bar 5" & 10"
- T Handle
- Ratchet Handle

  ⚡ 1000V



INSULATED D TRAY

- Content
- 14 pcs Open Wrenches and Adjustable Wrenches
- Open Wrench: 8/ 10/ 11/ 12/ 13/ 14/ 15/ 16/ 17/ 18/ 19/ 22/ 24
- 8" Adjustable Wrench

  ⚡ 1000V

INSULATED TOOLKIT TROLLEY

PN : IHO169

Drawers Trolley with Foam Profiles



Description	mm
Screwdriver (6)	0.4*2.5*75, 0.5*3.0*100, 0.6*3.5*100, 0.8*4.0*100, 1.0*5.5*125, 1.2*6.5*150
Phillips Screwdriver (4)	PH0*60, PH1*80, PH2*100, PH3*150
Pozi Screwdriver (4)	PZ0*60, PZ1*80, PZ2*100, PZ3*150
TX Screwdriver (5)	T10*70, T15*80, T20*100, T25*125, T30*130
Precision Screwdriver (5)	1.5*0.23*50, 1.8*0.30*50, 2.0*0.40*50, 2.5*0.40*50, 3.0*0.50*50
Precision Philips Screwdriver (2)	PH00*50, PH0*50
Nut Screwdriver (9)	6.0*125, 7.0*125, 8.0*125, 9.0*125, 10*125, 11*125, 12*125, 13*125, 14*125
Open Wrench (20)	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32
Ring Wrench (20)	6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32
Adj Wrench (3)	200, 250, 300
Allen Key (7)	3, 4, 5, 6, 8, 10, 12
Hex Key T-Type (5) With Ball End	3*150, 4*150, 5*150, 6*150, 8*150
Socket 3/8" (17)	6, 7, 8, 9, 10, 11, 12, 13, 15, 14, 16, 17, 18, 19, 20, 21, 22
Allen Socket 3/8" (4)	4*75, 5*75, 6*75, 8*75
Ratchet Wrench (1)	3/8"*200
Extension (2)	3/8"*125, 3/8"*250



T-Handle (1)	3/8"200
Socket Wrench (9)	8*200, 10*300, 12*300, 13*300, 14*300, 16*300, 17*300, 18*300, 19*300
Socket 1/2" (15)	10, 11, 12, 13, 14, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32
Allen Socket 1/2" (5)	4*120, 5*120, 6*120, 8*120, 10*120
Ratchet Wrench (1)	1/2"*250
Extensions (2)	1/2"*125, 1/2"*250
L-Handle (1)	1/2"*250
T-Handle (1)	1/2"*200
Combination Plier (2)	160, 200
Snipe Nose Side Cutting Plier (2)	160, 200
Curved Nose Cutting Plier (2)	160, 200
Diagonal Plier (1)	160
Heavy Duty Diagonal Plier (1)	180
Flat Nose Plier (1)	160
Wire Stripper (1)	160
Water Pump Plier (1)	300
Hacksaw Frame (1)	150
Cable Knife(Straight)	
Dismantling Knife(Semicircle)	
Dismantling Knife(Long Hook)	
Cable Knife(Guard)	
Dismantling Knife	
Multimeter	
Clampmeter	
Insulated Gloves Class 0	

42PC INSULATED MOBILE TOOL TROLLEY

PN : IH0841



Description	mm
Open Wrench (7)	8, 10, 11, 12, 13, 14, 17
Ring Wrench (7)	8, 10, 11, 12, 13, 14, 17
1/2" Socket (9)	8, 10, 11, 12, 13, 14, 17, 19, 22
Allen Key (6)	3, 4, 5, 6, 8, 10
T-Handle (1)	12"*200
Phillips Screwdriver (3)	PH0*60, PH1*180, PH2*100
Slotted Screwdriver (3)	0.6*3.5*100, 0.8*4.0*100, 1.0*5.5*125
Dismantling Knife (Semicircle)	
Cable Knife (Straight)	
Combination Plier	160
Diagonal Plier	160
Wire Stripper	160
Adj Wrench	200
Hand Gloves 1.1Kv	

INSULATED SOCKET SET 1/2" SQ DR

1000V VDE Insulated Tools Includes:

PN : DDC1201



Description	mm
1/2 Insulated Socket (15)	10, 11, 12, 13, 14, 16, 17, 18, 19, 21, 22, 24, 27, 30, 32
Insulated Allen Socket (5)	1/2" 4, 5, 6, 8, 10
Insulated Ratchet Wrench (1)	1/2" 250
Insulated Extension Bar (2)	1/2" 125, 250
Insulated T-Handle (1)	1/2" 200
Insulated L-Handle (1)	1/2" 270

INSULATED SOCKET SET 3/8" SQ DR

1000V VDE Insulated Tools Includes:

PN : DDC3801



Description	mm
3/8 Insulated Socket (14)	8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22
Insulated Allen Socket (4)	4, 5, 6, 8
Insulated Ratchet Wrench (1)	200
Insulated Extension Bar (2)	125, 250
Insulated T-Handle (1)	200

OUR PRODUCT VERTICALS

GET SAFE

INDUSTRIAL SAFETY EQUIPMENT

MEASURE UP

MEASURING EQUIPMENT FOR INDUSTRIAL NEEDS

TOOL IT

TOOLS FOR ASSEMBLY, OPERATION & MAINTENANCE

Authorised Partner/ Retailer

BOMBAY TOOLS



Scan the QR code
for more Variants

Bombay Tools Centre (Bombay) Pvt. Ltd.

A-407, Byculla Services Industries CHS, Dadoji
Konddeo Cross Ln, Byculla East, Mumbai 400027

+91 85913 06264

info@bombaytools.in

Follow us on:



www.thebombaytools.com